

# KOBELCO

SK210LC-11/SK210NLC-11/SK210SNLC-11

Performance  Design

## SK210<sub>LC</sub>

## SK210<sub>NLC</sub>

## SK210<sub>SNLC</sub>

- Bucket capacity:  
0.45 – 0.80 m<sup>3</sup>
- Engine power:  
124 kW / 2,000 min<sup>-1</sup>
- Operating weight:  
21,900 – 24,500 kg



**We Save You Fuel**  
Achieving a Low-Carbon Society



# Performance Design

SK210LC/SK210NLC/SK210SNLC of KOBELCO has realised a completely new value by harmonising PERFORMANCE – greater efficiency and productivity with an increased power and speed and DESIGN – operator-based operability and comfort, refusing to accept any compromises.

In pursuit of unique and matchless machines which are unforgettable once you use them, KOBELCO will continue to rise to meet every challenge.





# THE ULTIMATE IN SIMPLE AND ELEGANT DESIGN

Our pursuit of functional beauty and aesthetic sense produced a new interior design.

## Jog dial

This jog dial integrates multiple functions to realise simple operations. Even with gloved hands, the operator can set various machine conditions without stress.

## LED backlights

The switches and dials have LED backlights – they provide a bright, clear view in the dark and set a luxurious mood.









# UNFORGETTABLE COMFORT

## 1 Air suspension seat with heating

A GRAMMER\* seat is installed as standard equipment, which achieves excellent shock absorption and superior ride comfort.

\*GRAMMER is trademark of GRAMMER AG, registered in Germany and other countries.

## 2 Air-conditioner

Air is blown against the operator's waist and the back of their head, offering more comfortable operation.

## 3 Lever angles allow for comfortable operations

The operator can move the levers horizontally without twisting their wrist, which reduces the fatigue caused by the operations.




## New Hydraulic Control

Our newly upgraded hydraulic control system responds to shorter lever strokes than current models, delivering swifter, more precise movement and improved lever operability.

## 4 LED door light

The LED interior light automatically turns on when the door is opened or when the ignition is set to OFF. This ensures easy entry and exit at nighttime.

## 5 Parallel wipers secure a wide field of view

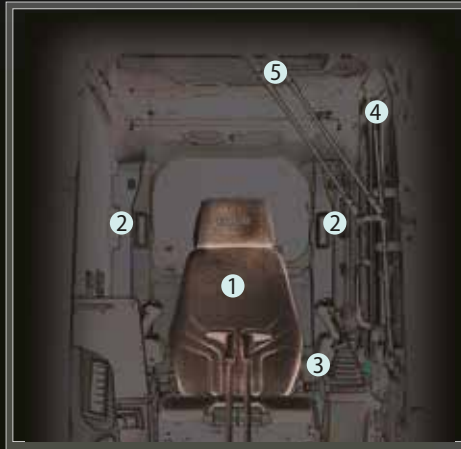

KOBELCO

ECO

04:33



SETTING MENU



PICTURE OF  
CAMERA



CLOCK  
SETTING



SCREEN  
BRIGHTNESS



MAINTENANCE



CONSUMPTION



LANGUAGE  
SELECTION



PRESSURE  
RELEASE





# A WIDER VIEW BRINGS A WIDER RANGE OF USE

## 10-inch colour monitor (the largest in the industry)


The easy-to-operate menu screen facilitates reading of important information. Images from the built-in cameras can be checked on the large screen, which helps secure safety. In addition, each icon has become easy to recognise. A password is required when starting the engine for greater security.



The right camera and rear view camera (right side view mode)

The right camera and rear view camera (straight view mode)

The right camera and rear view camera (right side view mode)



The right camera and rear view camera (straight view mode)



The bird's-eye view




The eagle eye view

## Right camera and rear view camera

Images from the right camera and rear view camera are displayed together on the large colour monitor. The right camera view can be selected between the straight view mode and right side view mode.

In addition, the bird's-eye view mode and the eagle eye mode can also be selected.



## Screen display linked with the jog dial operation


The jog dial can be operated as desired without causing stress. Turn the jog dial to the right or left to select an item and press the dial to confirm the selection.





### Independent Travel

Selecting Independent Travel dedicates one hydraulic pump to travel and one to the attachment on a continuous basis, allowing for a smooth and constant movement speed even while swinging or using the boom or attachment. With Independent Travel, safely carrying a large pipe across a job site is a breeze.



## EXPERIENCING A COMPETENT PERFORMANCE

### Excellent machine stability, plus a high-output engine

Equipped with a new high-output engine, the SK210LC/SK210NLC/SK210SNLC features outstanding stability thanks to an innovative new shape for conventional excavator, as well as a larger counterweight.

Model: HINO J05EVA-KSSA

Engine output

**124 kW / 2,000 min<sup>-1</sup>**





»» Max. bucket digging force (Arm 2.94 m)

Normal: **143** kN

With Power Boost: **157** kN

Lift capacity

**11,820** kg

(Reach: 4.50 m Boom: 5.65 m Arm: 2.94 m Bucket: Without Counterweight: 4,900 kg Shoe: 600 mm <Heavy Lift>)





# GREATER MULTI-FUNCTION CAPABILITIES

## Attachment mode

The flow rate and working pressure modes of the bucket, breaker, nibbler, and rotating grapple are set before delivery, which allows you to start operating immediately. Mode settings for other attachments, such as the tilt rotator, can easily be added or changed.



## Adjustment for hydraulic flow

Divide ratio of hydraulic flow can be adjusted by service factory for custom usage.



# EASY MAINTENANCE



## Standard OPG Level II top guard

The standard OPG Level II top guard can be tilted open for easy window cleaning. Meets standard FOPS and OPG Level II top guard requirements. (ISO 10262:1998)



## Two-stage air filter



## Urea tank

Urea filter cap is placed on the step for easy access.



## Left side (radiator and cooling system elements)

Laid out for easy access to radiator and cooling system.



## Right side



## Fuel filter/Pre-filter



## Engine oil filter



# DURABILITY YOU CAN TRUST

## Enhanced body rigidity for 20-ton class machines

The SK210LC, SK210NLC and SK210SNLC machines are widely used in mid-scale construction projects and harsh worksites. The components have been reviewed and improvements have been made to their durability to ensure stable performance in such environments.



### Panels and supports

The right and left side panels and rear supports have been thicker to enhance body rigidity.



### Bucket cylinder rod pin

The increased diameter of the bucket cylinder rod pin contributes to enhanced durability for various types of attachments.



# CONVENIENT AND SENSIBLE EQUIPMENT



## Engine start password

A password is required when starting the engine for greater security. The initial password must be set at our workshop.



## Wiper adjustment function

In addition to the intermittent wiper mode and continuous wiper mode, the one-time wiper mode was added.



## Parallel wipers/Sun screen



## Console mount

The console-integrated seat allows for comfortable operation.



## DAB+ radio (FM/AM & AUX & USB & Bluetooth® & hands-free telephone)



## USB port/12 V power supply



## Smartphone holder

You can use the holder with your smartphone connected to the USB port.



# KOBELCO MONITORING EXCAVATOR SYSTEM




## Remote Monitoring for Peace of Mind

KOMEXS (Kobelco Monitoring Excavator System) uses satellite communication and internet to relay data, and therefore can be deployed in areas where other forms of communication are difficult. When a hydraulic excavator is fitted with this system, data on the machine's operation, such as operating hours, location, fuel consumption, and maintenance status can be obtained remotely.


## Direct Access to Operational Status

### Location Data

Accurate location data can be obtained even from sites where communications are difficult.

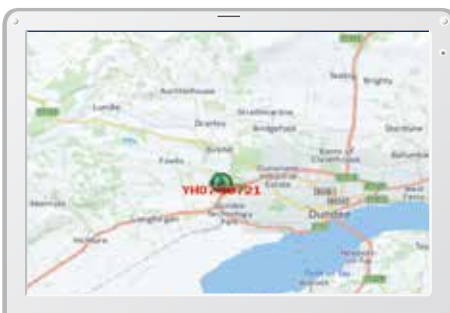

Latest location

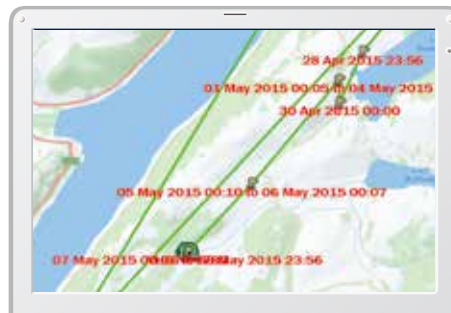


Location records

Type of Operation	Working Hrs	Ratio
Total Working Hrs	169 Hrs	100 %
Digging Hrs	72.2 Hrs	43 %
Traveling Hrs	18.3 Hrs	11 %
Idle Hrs	15.9 Hrs	9 %
Opt Alt Hrs	62.5 Hrs	37 %
Crane Mode Hrs	0 Hrs	0 %

Work data

## Operating Hours

- A comparison of operating times of machines at multiple locations shows which locations are busier and more profitable.
- Operating hours on site can be accurately recorded, for running time calculations needed for rental machines, etc.

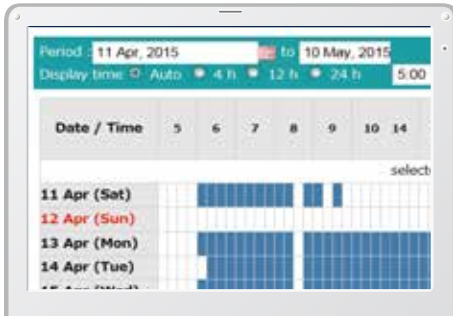

Daily report

## Fuel Consumption Data


Data on fuel consumption and idling times can be used to indicate improvements in fuel consumption.

Work mode	Working Hrs	Total Fuel Consumption
H mode	2:06	24.5 L
S mode	0:00	0.0 L
E mode	169:19	1489.7 L
<b>TOTAL</b>	<b>171:25</b>	<b>1514.2 L</b>

Fuel consumption

## Graph of Work Content

The graph shows how working hours are divided among different operating categories, including digging, idling, travelling and optional operations.

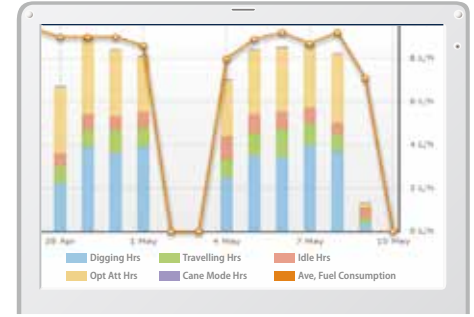

Work status

## Maintenance Data and Warning Alerts

### Machine Maintenance Data

- Provides maintenance status of separate machines operating at multiple sites.
- Maintenance data is also relayed to KOBELCO service personnel, for more efficient planning of periodic servicing.

Model	Serial No.	Hour Meter	Engine Oil
SK135RCL-3/SK140SRL	YH07-09721	734 Hr	434
SK135RCL-3/SK140SRL	YH07-09789	73 Hr	429
SK210LC-9	YQ13-10454	960 Hr	58
SK210LC-9	YQ13-10481	549 Hr	498
SK75SR-	YTP8-20374		

Maintenance

### Warning Alerts

This system warns an alert if an anomaly is sensed, preventing damage that could result in machine downtime.

## Alarm Information Can Be Received through E-mail

Alarm information or maintenance notice can be received through E-mail, using a computer or cell phone.



Alarm messages can be received on mobile device.

## Daily/Monthly Reports

Operational data downloaded onto a computer helps in formulating daily and monthly reports.

## Security System

### Engine Start Alarm

The system can be set an alarm if the machine is operated outside designated time.

Engine start alarm outside prescribed work time

### Area Alarm

It can be set an alarm if the machine is moved out of its designated area to another location.

Alarm for outside of reset area



# Specifications

## Engine

Model	SK210LC/NLC	HINO J05EVA-KSSA
	SK210SNLC	HINO J05EVA-KSSN
Type	Direct Injection, water-cooled, 4 cycle diesel engine with turbocharger, intercooler.	
No. of cylinders	4	
Bore and stroke	112 mm x 130 mm	
Displacement	5.123 L	
Rated power output	119 kW / 2,000 min <sup>-1</sup> (ISO 9249 : with fan)	
	124 kW / 2,000 min <sup>-1</sup> (ISO 14396: without fan)	
Max. torque	640 N·m / 1,600 min <sup>-1</sup> (ISO 9249: with fan)	
	660 N·m / 1,600 min <sup>-1</sup> (ISO 14396: without fan)	

## Hydraulic system

Pump	
Type	Axial piston pumps + extra gear pump + pilot gear pump
Max. discharge flow	2 x 220 L/min, 1 x 40.6 L/min, 1 x 20 L/min
Relief valve setting	
Boom, arm and bucket	34.3 MPa {350 kgf/cm <sup>2</sup> }
Power Boost*	37.8 MPa {385 kgf/cm <sup>2</sup> }
Travel circuit	34.3 MPa {350 kgf/cm <sup>2</sup> }
Swing circuit	29.0 MPa {296 kgf/cm <sup>2</sup> }
Control circuit	5.0 MPa {50 kgf/cm <sup>2</sup> }
Pilot control pump	Gear type
Main control valve	8-spool
Oil cooler	Air cooled type

\*Not available for Long Reach

## Swing system

Swing motor	One fixed displacement piston motor
Brake	Hydraulic; locking automatically when the swing control lever is in neutral position
Parking brake	Oil disc brake, hydraulic operated automatically
Swing speed	12.7 min <sup>-1</sup>
Swing torque	71.5 kN·m

## Attachments

Backhoe bucket and combination.

Use	Backhoe bucket				
	Normal digging				
Bucket capacity	ISO heaped	m <sup>3</sup>	0.45	0.70	0.80
Opening width	With side cutter	mm	910	1,080	1,160
	Without side cutter	mm	815	980	1,140
No. of teeth			5	5	5
Bucket weight		kg	360	630	660
Combination	2.40 m short arm		—	○	○
	2.94 m standard arm		—	○	◎
	3.50 m long arm		—	◎	△
	6.35 m arm (Long Reach)		◎	—	—

◎ Standard ○ Recommended △ Loading only

## Travel system

Travel motors	2 x axial-piston, two-step motors	
Travel brakes	Hydraulic brake per motor	
Parking brakes	Oil disc brake per motor	
Travel shoes	49 each side	
Travel speed	6.0/3.6 km/h	
Drawbar pulling force	SK210LC/NLC	228 kN (SAE)
	SK210SNLC	227 kN (SAE)
Gradeability	70% {35°}	

## Cab & control

### Cab

All-weather, sound-suppressed steel cab mounted on the high suspension mounts filled with silicone oil and equipped with a heavy, insulated floor mat.

### Control

Two hand levers and two foot pedals for travel

Two hand levers for excavating and swing

Electric rotary-type engine throttle

### Noise levels

External	100 dB(A) (2000/14/EC)
Operator	68 dB (A) (ISO 6396)

### Vibration levels

Hand/arm*	≤ 2.5 m/s <sup>2</sup>
Body*	≤ 0.5 m/s <sup>2</sup>

\*For the risk assessment according to 2002/44/EC, refer to ISO/TR 25398: 2006.

## Boom, arm & bucket

Boom cylinders	120 mm x 1,355 mm
Arm cylinder (Long Reach)	135 mm x 1,558 mm (135 mm x 1,489 mm)
Bucket cylinder (Long Reach)	120 mm x 1,080 mm (111 mm x 885 mm)
Jib cylinder*	150 mm x 992 mm

\*For 2 Piece Boom only

## Refilling capacities & lubrications

Fuel tank	321 L	
Cooling system	19 L	
Engine oil	20.5 L	
Travel reduction gear	2 x 5.3 L	
Swing reduction gear	1 x 2.7 L	
Hydraulic oil tank	140 L tank oil level	
	244 L hydraulic system	
DEF/ Urea tank	SK210LC/NLC	83 L
	SK210SNLC	34 L

# SK210<sup>LC</sup>

SK210LC-11

# SK210<sup>NLC</sup>

SK210NLC-11

# SK210<sup>SNLC</sup>

SK210SNLC-11

## Working ranges

Unit: m


Boom		5.65 m		
Arm		Short 2.40 m	Standard 2.94 m	Long 3.50 m
Range				
a- Max. digging reach		9.42	9.90	10.34
b- Max. digging reach at ground level		9.24	9.73	10.17
c- Max. digging depth		6.16	6.70	7.26
d- Max. digging height		9.51	9.72	9.75
e- Max. dumping clearance		6.68	6.91	6.97
f- Min. dumping clearance		2.98	2.43	1.87
g- Max. vertical wall digging depth		5.57	6.10	6.47
h- Min. swing radius		3.56	3.55	3.48
i- Horizontal digging stroke at ground level		4.08	5.27	6.08
j- Digging depth for 2.4 m (8') flat bottom		5.95	6.52	7.08
Bucket capacity ISO heaped m <sup>3</sup>		0.93	0.80	0.70

## Digging Force (ISO 6015)

Unit: kN

Arm length	Short 2.40 m	Standard 2.94 m	Long 3.50 m
Bucket digging force	143 157*	143 157*	143 157*
Arm crowding force	121 133*	102 112*	91.8 101*

\*Power Boost engaged.

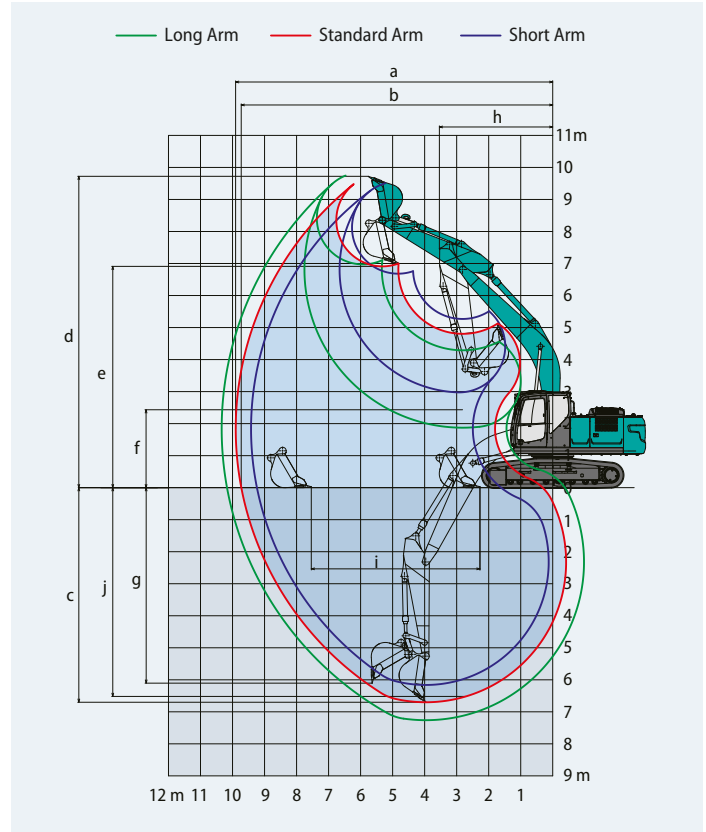

## Dimensions (SK210LC/SK210NLC)

Unit: mm

Arm length		Short 2.40 m	Standard 2.94 m	Long 3.50 m
A	Overall length	9,680	9,600	9,670
B	Overall height (to top of boom)	3,200	3,030	3,210
C	Overall width of crawler	SK210LC	2,990	
		SK210NLC	2,800	
D	Overall height (to top of cab)		3,060	
E	Ground clearance of rear end*		1,060	
F	Ground clearance*		425	
G	Tail swing radius		2,910	
G'	Distance from centre of swing to rear end		2,900	
H	Tumbler distance		3,660	
I	Overall length of crawler		4,450	
J	Track gauge	SK210LC	2,390	
		SK210NLC	2,200	
K	Shoe width		600	
L	Overall width of upperstructure		2,710	


\*Without including height of shoe

## Dimensions (SK210SNLC)

Unit: mm

Arm length		Short 2.40 m	Standard 2.94 m
A	Overall length	9,580	9,500
B	Overall height (to top of boom)	3,200	3,030
C	Overall width of crawler		2,540
D	Overall height (to top of cab)		3,060
E	Ground clearance of rear end*		1,050
F	Ground clearance*		425
G	Tail swing radius		2,800
G'	Distance from centre of swing to rear end		2,800
H	Tumbler distance		3,660
I	Overall length of crawler		4,450
J	Track gauge		2,040
K	Shoe width		500
L	Overall width of upperstructure		2,540

\*Without including height of shoe

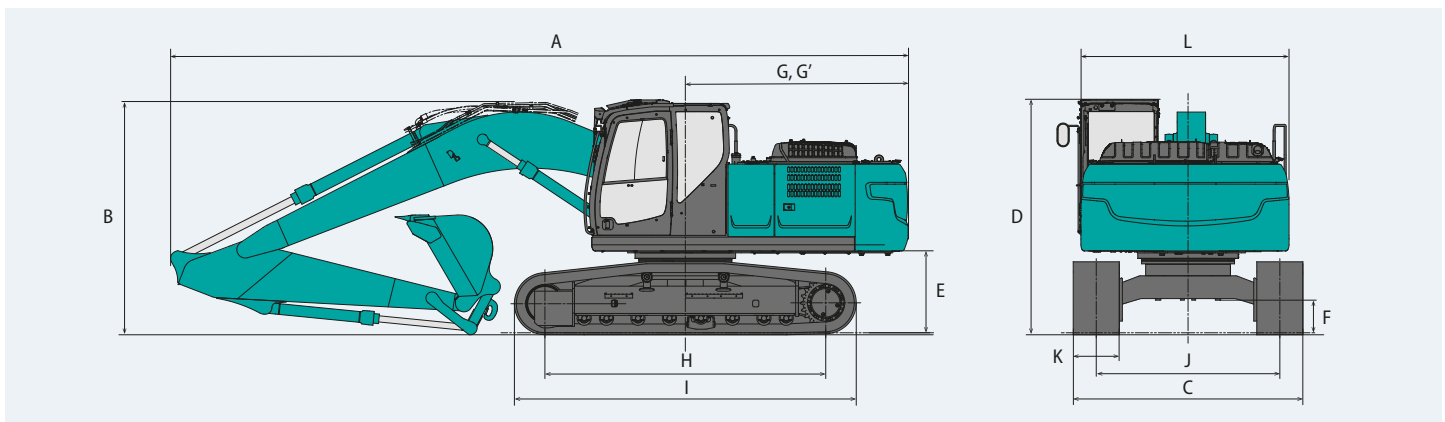

# Operating weight & ground pressure




In standard trim, with standard boom, 2.94 m arm, and 0.8 m³ ISO heaped bucket.

Shaped			Triple grouser shoes (even height)				
Shoe width		mm	500	600	700	790	900
Overall width of crawler	SK210LC	mm	—	2,990	3,090	3,180	3,290
	SK210NLC	mm	—	2,800	2,900	2,990	—
	SK210SNLC	mm	2,540	2,640	—	—	—
Ground pressure	SK210LC	kPa	—	45	40	36	32
	SK210NLC	kPa	—	45	40	35	—
	SK210SNLC	kPa	56	47	—	—	—
Operating weight	SK210LC	kg	—	21,900	22,400	22,600	22,900
	SK210NLC	kg	—	21,900	22,300	22,500	—
	SK210SNLC	kg	22,400	22,600	—	—	—

In standard trim, with standard boom, 2.94 m arm, and 0.8 m³ ISO heaped bucket (optional counterweight 4,900 kg).

Shaped			Triple grouser shoes (even height)			
Shoe width		mm	600	700	790	900
Overall width of crawler	SK210LC	mm	2,990	3,090	3,180	3,290
	SK210NLC	mm	2,800	2,900	2,990	—
Ground pressure	SK210LC	kPa	47	41	37	33
	SK210NLC	kPa	47	41	36	—
Operating weight	SK210LC	kg	22,500	23,000	23,200	23,500
	SK210NLC	kg	22,500	22,900	23,100	—

## Lift capacities



A - Reach from swing centerline to arm top  
 B - Arm top height above/below ground  
 C - Lift point  
 Relief valve setting: 37.8 MPa (385 kgf/cm²)

SK210LC		Boom: 5.65 m Arm: 2.94 m Bucket: without Counterweight: 4,300 kg Shoe: 600 mm (Heavy Lift)												
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius
7.5 m	kg							*5,300	*5,300			*4,270	*4,270	6.26 m
6.0 m	kg							*5,880	5,480			*3,940	3,850	7.36 m
4.5 m	kg							*6,420	5,280	5,680	3,680	*3,860	3,270	8.03 m
3.0 m	kg					*9,360	7,670	*7,270	5,000	5,540	3,560	*3,930	2,980	8.38 m
1.5 m	kg					*11,040	7,100	7,570	4,720	5,400	3,430	*4,170	2,870	8.45 m
G.L.	kg			*6,330	*6,330	11,660	6,790	7,360	4,530	5,290	3,330	*4,600	2,920	8.25 m
-1.5 m	kg	*6,700	*6,700	*11,060	*11,060	11,560	6,700	7,270	4,460	5,260	3,310	5,030	3,170	7.75 m
-3.0 m	kg	*11,730	*11,730	*14,650	13,240	*10,550	6,780	7,320	4,510			6,010	3,770	6.89 m
-4.5 m	kg			*10,860	*10,860	*7,950	7,050					*5,980	5,330	5.50 m

SK210LC		Boom: 5.65 m Arm: 3.50 m Bucket: without Counterweight: 4,300 kg Shoe: 600 mm (Heavy Lift)												
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius
7.5 m	kg											*3,640	*3,640	6.84 m
6.0 m	kg									*4,540	3,790	*3,430	*3,430	7.86 m
4.5 m	kg							*5,840	5,350	*5,440	3,710	*3,400	2,970	8.49 m
3.0 m	kg			*12,860	*12,860	*8,480	7,840	*6,750	5,050	5,550	3,560	*3,490	2,720	8.82 m
1.5 m	kg			*7,240	*7,240	*10,380	7,190	7,600	4,740	5,380	3,410	*3,710	2,610	8.89 m
G.L.	kg			*7,730	*7,730	*11,520	6,770	7,330	4,500	5,240	3,280	*4,110	2,650	8.70 m
-1.5 m	kg	*6,570	*6,570	*10,960	*10,960	11,470	6,610	7,190	4,380	5,170	3,220	4,540	2,840	8.22 m
-3.0 m	kg	*10,480	*10,480	*15,820	12,950	*11,000	6,630	7,190	4,380			5,290	3,300	7.42 m
-4.5 m	kg	*15,580	*15,580	*12,690	*12,690	*9,090	6,820	*6,410	4,540			*6,100	4,390	6.16 m



# SK210<sub>LC</sub>

SK210LC-11

# SK210<sub>NLC</sub>

SK210NLC-11

# SK210<sub>SNLC</sub>

SK210SNLC-11

SK210LC		Boom: 5.65 m Arm: 2.40 m Bucket: without Counterweight: 4,300 kg Shoe: 600 mm (Heavy Lift)											
B	A	3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius	
7.5 m	kg										*6,320	6,030	5.58 m
6.0 m	kg					*6,470	5,380				*5,760	4,340	6.80 m
4.5 m	kg			*8,260	8,130	*6,930	5,210	5,620	3,630		5,590	3,610	7.52 m
3.0 m	kg			*10,100	7,490	*7,700	4,940	5,520	3,540		5,090	3,270	7.89 m
1.5 m	kg			*11,520	6,990	*7,530	4,700	5,400	3,440		4,940	3,150	7.97 m
G.L.	kg			11,640	6,780	7,360	4,540	5,330	3,370		5,090	3,230	7.75 m
-1.5 m	kg	*11,440	*11,440	*11,390	6,760	7,320	4,510				5,630	3,560	7.22 m
-3.0 m	kg	*13,150	*13,150	*9,880	6,900	*7,190	4,630				*6,580	4,370	6.29 m
-4.5 m	kg			*6,230	*6,230						*5,690	*5,690	4.72 m

SK210LC		Boom: 5.65 m Arm: 2.94 m Bucket: without Counterweight: 4,900 kg Shoe: 600 mm (Heavy Lift)												
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius
7.5 m	kg							*5,300	*5,300			*4,270	*4,270	6.26 m
6.0 m	kg							*5,880	5,840			*3,940	*3,940	7.36 m
4.5 m	kg							*6,420	5,640	*5,910	3,960	*3,860	3,520	8.03 m
3.0 m	kg					*9,360	8,200	*7,270	5,360	5,890	3,840	*3,930	3,210	8.38 m
1.5 m	kg					*11,040	7,620	8,040	5,090	5,740	3,700	*4,170	3,110	8.45 m
G.L.	kg			*6,330	*6,330	*11,820	7,310	7,820	4,890	5,630	3,600	*4,600	3,170	8.25 m
-1.5 m	kg	*6,700	*6,700	*11,060	*11,060	*11,650	7,230	7,740	4,820	5,610	3,580	5,360	3,440	7.75 m
-3.0 m	kg	*11,730	*11,730	*14,650	14,230	*10,550	7,310	7,790	4,870			*6,330	4,080	6.89 m
-4.5 m	kg			*10,860	*10,860	*7,950	7,570					*5,980	5,730	5.50 m

SK210LC		Boom: 5.65 m Arm: 3.50 m Bucket: without Counterweight: 4,900 kg Shoe: 600 mm (Heavy Lift)														
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius		
7.5 m	kg											*3,640	*3,640	6.84 m		
6.0 m	kg											*4,540	4,060	*3,430	*3,430	7.86 m
4.5 m	kg							*5,840	5,710	*5,440	3,980	*3,400	3,210	8.49 m		
3.0 m	kg			*12,860	*12,860	*8,480	8,370	*6,750	5,410	*5,860	3,840	*3,490	2,940	8.82 m		
1.5 m	kg			*7,240	*7,240	*10,380	7,720	*7,700	5,100	5,720	3,680	*3,710	2,840	8.89 m		
G.L.	kg			*7,730	*7,730	*11,520	7,300	7,800	4,860	5,590	3,550	*4,110	2,880	8.70 m		
-1.5 m	kg	*6,570	*6,570	*10,960	*10,960	*11,710	7,140	7,660	4,740	5,200	3,490	*4,820	3,080	8.22 m		
-3.0 m	kg	*10,480	*10,480	*15,820	13,940	*11,000	7,160	7,660	4,740			5,640	3,580	7.42 m		
-4.5 m	kg	*15,580	*15,580	*12,690	*12,690	*9,090	7,350	*6,410	4,900			*6,100	4,740	6.16 m		













SK210LC		Boom: 5.65 m Arm: 2.40 m Bucket: without Counterweight: 4,900 kg Shoe: 600 mm (Heavy Lift)											
B	A	3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius	
7.5 m	kg										*6,320	*6,320	5.58 m
6.0 m	kg					*6,470	5,740				*5,760	4,650	6.80 m
4.5 m	kg			*8,260	*8,260	*6,930	5,570	*5,850	3,910		*5,610	3,880	7.52 m
3.0 m	kg			*10,100	8,020	*7,700	5,300	5,860	3,820		5,410	3,520	7.89 m
1.5 m	kg			*11,520	7,520	8,000	5,060	5,740	3,710		5,250	3,400	7.97 m
G.L.	kg			*11,920	7,310	7,830	4,900	5,670	3,640		5,420	3,490	7.75 m
-1.5 m	kg	*11,440	*11,440	*11,390	7,290	7,790	4,870				6,000	3,840	7.22 m
-3.0 m	kg	*13,150	*13,150	*9,880	7,430	*7,190	4,990				*6,580	4,710	6.29 m
-4.5 m	kg			*6,230	*6,230						*5,690	*5,690	4.72 m













### Notes:











- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
- Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
- Arm top defined as lift point.
- The above lift capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lift













capacity or 75% of tipping load. Lift capacities marked with an asterisk (\*) are limited by hydraulic capacity rather than tipping load.

- Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
- Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

SK210NLC		Boom: 5.65 m		Arm: 2.94 m		Bucket: without		Counterweight: 4,300 kg		Shoe: 600 mm (Heavy Lift)					
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach			
														Radius	
7.5 m	kg							*5,300	5,060			*4,270	*4,270	6.26 m	
6.0 m	kg							*5,880	5,050			*3,940	3,540	7.36 m	
4.5 m	kg							*6,420	4,850	5,670	3,380	*3,860	2,990	8.03 m	
3.0 m	kg						*9,360	6,980	*7,270	4,580	5,530	3,260	*3,930	2,720	8.38 m
1.5 m	kg						*11,040	6,420	7,560	4,310	5,390	3,130	*4,170	2,620	8.45 m
G.L.	kg			*6,330	*6,330	11,630	6,120	7,340	4,120	5,280	3,030	*4,600	2,660	8.25 m	
-1.5 m	kg	*6,700	*6,700	*11,060	*11,060	11,530	6,040	7,250	4,040	5,250	3,010	5,020	2,890	7.75 m	
-3.0 m	kg	*11,730	*11,730	*14,650	11,700	*10,550	6,120	7,310	4,090			6,000	3,440	6.89 m	
-4.5 m	kg			*10,860	*10,860	*7,950	6,370					*5,980	4,850	5.50 m	

SK210NLC		Boom: 5.65 m		Arm: 3.50 m		Bucket: without		Counterweight: 4,300 kg		Shoe: 600 mm (Heavy Lift)				
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		
														Radius
7.5 m	kg											*3,640	*3,640	6.84 m
6.0 m	kg									*4,540	3,480	*3,430	3,180	7.86 m
4.5 m	kg							*5,480	4,920	*5,440	3,400	*3,400	2,720	8.49 m
3.0 m	kg			*12,860	*12,860	*8,480	7,140	*6,750	4,620	5,540	3,260	*3,490	2,480	8.82 m
1.5 m	kg			*7,240	*7,240	*10,380	6,510	7,580	4,320	5,370	3,110	*3,710	2,380	8.89 m
G.L.	kg			*7,730	*7,730	*11,520	6,110	7,310	4,090	5,230	2,980	*4,110	2,400	8.70 m
-1.5 m	kg	*6,570	*6,570	*10,960	*10,960	11,440	5,950	7,180	3,970	5,160	2,920	4,530	2,580	8.22 m
-3.0 m	kg	*10,480	*10,480	*15,820	11,410	*11,000	5,970	7,170	3,970			5,280	3,000	7.42 m
-4.5 m	kg	*15,580	*15,580	*12,690	11,780	*9,090	6,150	*6,410	4,130			*6,100	3,990	6.16 m

SK210NLC		Boom: 5.65 m		Arm: 2.40 m		Bucket: without		Counterweight: 4,300 kg		Shoe: 600 mm (Heavy Lift)				
B	A	3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius		
														
7.5 m	kg											*6,320	5,550	5.58 m
6.0 m	kg							*6,470	4,960			*5,760	3,990	6.80 m
4.5 m	kg							*6,930	4,780	5,600	3,330	5,570	3,310	7.52 m
3.0 m	kg			*8,260	7,430	*6,930	6,810	*7,700	4,520	5,510	3,250	5,070	2,990	7.89 m
1.5 m	kg			*10,100	6,810	*7,700	6,320	7,520	4,280	5,390	3,140	4,920	2,870	7.97 m
G.L.	kg			*11,520	6,320	7,520	4,280	5,390	3,140	4,920	2,870	5,070	2,940	7.75 m
-1.5 m	kg	*11,440	*11,440	*11,390	6,100	7,310	4,100					5,620	3,240	7.22 m
-3.0 m	kg	*13,150	11,920	*9,880	6,240	*7,190	4,210					*6,580	3,990	6.29 m
-4.5 m	kg			*6,230	*6,230							*5,690	*5,690	4.72 m

SK210NLC		Boom: 5.65 m		Arm: 2.94 m		Bucket: without		Counterweight: 4,900 kg		Shoe: 600 mm (Heavy Lift)					
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach			
														Radius	
7.5 m	kg							*5,300	*5,300			*4,270	*4,270	6.26 m	
6.0 m	kg							*5,880	5,390			*3,940	3,810	7.36 m	
4.5 m	kg							*6,420	5,200	*5,910	3,650	*3,860	3,240	8.03 m	
3.0 m	kg						*9,360	7,480	*7,270	4,920	5,880	3,530	*3,930	2,950	8.38 m
1.5 m	kg						*11,040	6,920	8,020	4,650	5,730	3,390	*4,170	2,840	8.45 m
G.L.	kg			*6,330	*6,330	*11,820	6,620	7,810	4,470	5,620	3,300	*4,600	2,900	8.25 m	
-1.5 m	kg	*6,700	*6,700	*11,060	*11,060	*11,650	6,540	7,720	4,390	5,600	3,270	5,350	3,140	7.75 m	
-3.0 m	kg	*11,730	*11,730	*14,650	12,610	*10,550	6,620	7,780	4,440			*6,330	3,730	6.89 m	
-4.5 m	kg			*10,860	*10,860	*7,950	6,870					*5,980	5,230	5.50 m	

# SK210<sup>LC</sup>













SK210LC-11











# SK210<sup>NLC</sup>













SK210NLC-11











# SK210<sup>SNLC</sup>

SK210SNLC-11

SK210NLC		Boom: 5.65 m Arm: 3.50 m Bucket: without Counterweight: 4,900 kg Shoe: 600 mm (Heavy Lift)												
B \ A		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius
														
7.5 m	kg											*3,640	*3,640	6.84 m
6.0 m	kg									*4,540	3,740	*3,430	3,430	7.86 m
4.5 m	kg							*5,840	5,260	*5,440	3,670	*3,400	2,950	8.49 m
3.0 m	kg			*12,860	*12,860	*8,480	7,640	*6,750	4,970	*5,860	3,520	*3,490	2,700	8.82 m
1.5 m	kg			*7,240	*7,240	*10,380	7,010	*7,700	4,660	*5,710	3,370	*3,710	2,590	8.89 m
G.L.	kg			*7,730	*7,730	*11,520	6,610	7,780	4,430	5,570	3,240	*4,110	2,620	8.70 m
-1.5 m	kg	*6,570	*6,570	*10,960	*10,960	*11,710	6,450	7,640	4,310	5,500	3,180	*4,820	2,810	8.22 m
-3.0 m	kg	*10,480	*10,480	*15,820	12,330	*11,000	6,470	7,640	4,310			5,620	3,260	7.42 m
-4.5 m	kg	*15,580	*15,580	*12,690	*12,690	*9,090	6,650	*6,410	4,470			*6,100	4,320	6.16 m

SK210NLC		Boom: 5.65 m Arm: 2.40 m Bucket: without Counterweight: 4,900 kg Shoe: 600 mm (Heavy Lift)												
B \ A		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius		
														
7.5 m	kg											*6,320	5,920	5.58 m
6.0 m	kg					*6,470	5,300					*5,760	4,280	6.80 m
4.5 m	kg			*8,260	7,930	*6,930	5,130	*5,850	3,600	*5,610	3,570	*5,610	3,570	7.52 m
3.0 m	kg			*10,100	7,310	*7,700	4,870	5,850	3,510	5,400	3,240	5,400	3,240	7.89 m
1.5 m	kg			*11,520	6,820	7,990	4,630	5,730	3,400	5,240	3,120	5,240	3,120	7.97 m
G.L.	kg			*11,920	6,620	7,810	4,480	5,660	3,330	5,400	3,200	5,400	3,200	7.75 m
-1.5 m	kg	*11,440	*11,440	*11,390	6,600	7,780	4,440	5,980	3,520	5,980	3,520	5,980	3,520	7.22 m
-3.0 m	kg	*13,150	12,830	*9,880	6,740	*7,190	4,560	5,980	3,520	5,980	3,520	5,980	3,520	6.29 m
-4.5 m	kg			*6,230	*6,230			5,690	3,330	5,400	3,200	5,690	3,330	4.72 m

SK210SNLC		Boom: 5.65 m Arm: 2.94 m Bucket: without Counterweight: 4,900 kg Shoe: 500 mm (Heavy Lift)												
B \ A		1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius
														
7.5 m	kg							*5,330	5,060			*4,300	*4,300	6.26 m
6.0 m	kg							*5,940	5,050			*3,980	3,580	7.36 m
4.5 m	kg							*6,490	4,870	*5,980	3,430	*3,890	3,050	8.03 m
3.0 m	kg					*9,450	6,950	*7,360	4,610	5,880	3,320	*3,970	2,780	8.38 m
1.5 m	kg					*11,150	6,430	8,030	4,350	5,740	3,190	*4,200	2,680	8.45 m
G.L.	kg			*6,370	*6,370	*11,940	6,140	7,820	4,180	5,640	3,100	*4,640	2,730	8.25 m
-1.5 m	kg	*6,730	*6,730	*11,090	*11,090	*11,770	6,060	7,730	4,100	5,610	3,070	5,370	2,950	7.75 m
-3.0 m	kg	*11,760	*11,760	*14,800	11,460	*10,660	6,140	7,780	4,150			6,400	3,500	6.89 m
-4.5 m	kg			*11,000	*11,000	*8,060	6,370					*6,070	4,880	5.50 m

SK210SNLC		Boom: 5.65 m Arm: 2.40 m Bucket: without Counterweight: 4,900 kg Shoe: 500 mm (Heavy Lift)												
B \ A		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius		
														
7.5 m	kg											*6,370	5,570	5.58 m
6.0 m	kg					*6,570	4,990					*5,800	4,050	6.80 m
4.5 m	kg			*8,380	7,400	*7,030	4,830	*5,890	3,410	*5,650	3,390	*5,650	3,390	7.52 m
3.0 m	kg			*10,230	6,830	*7,820	4,590	5,890	3,330	5,430	3,070	5,430	3,070	7.89 m
1.5 m	kg			*11,680	6,370	8,020	4,360	5,770	3,220	5,280	2,960	5,280	2,960	7.97 m
G.L.	kg			*12,080	6,180	7,860	4,220	5,700	3,160	5,440	3,030	5,440	3,030	7.75 m
-1.5 m	kg	*11,480	*11,480	*11,550	6,160	7,820	4,190	5,920	3,520	6,020	3,330	6,020	3,330	7.22 m
-3.0 m	kg	*13,350	11,720	*10,030	6,290	*7,310	4,290	5,920	3,520	6,020	3,330	6,020	3,330	6.29 m
-4.5 m	kg			*6,360	*6,360			5,820	3,330	5,400	3,200	5,820	3,330	4.72 m

### Notes:

- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
- Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
- Arm top defined as lift point.
- The above lift capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Lift capacities marked with an asterisk (\*) are limited by hydraulic capacity rather than tipping load.
- Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
- Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.




## 2 Piece Boom Specifications

### Working ranges

Unit: m

Boom		3.16 m + 2.63 m		
Arm		Short 2.40 m	Standard 2.94 m	Long 3.50 m
a-	Max. digging reach	9.57	10.07	10.53
b-	Max. digging reach at ground level	9.39	9.90	10.37
c-	Max. digging depth	5.89	6.42	6.93
d-	Max. digging height	10.83	11.23	11.50
e-	Max. dumping clearance	7.95	8.35	8.62
f-	Min. dumping clearance	1.51	0.97	0.41
g-	Max. vertical wall digging depth	5.07	5.58	6.02
h-	Min. swing radius	2.76	2.55	2.72
i-	Horizontal digging stroke at ground level	5.77	6.80	7.80
j-	Digging depth for 2.4 m (8') flat bottom	5.78	6.31	6.83
Bucket capacity ISO heaped m <sup>3</sup>		0.93	0.80	0.70

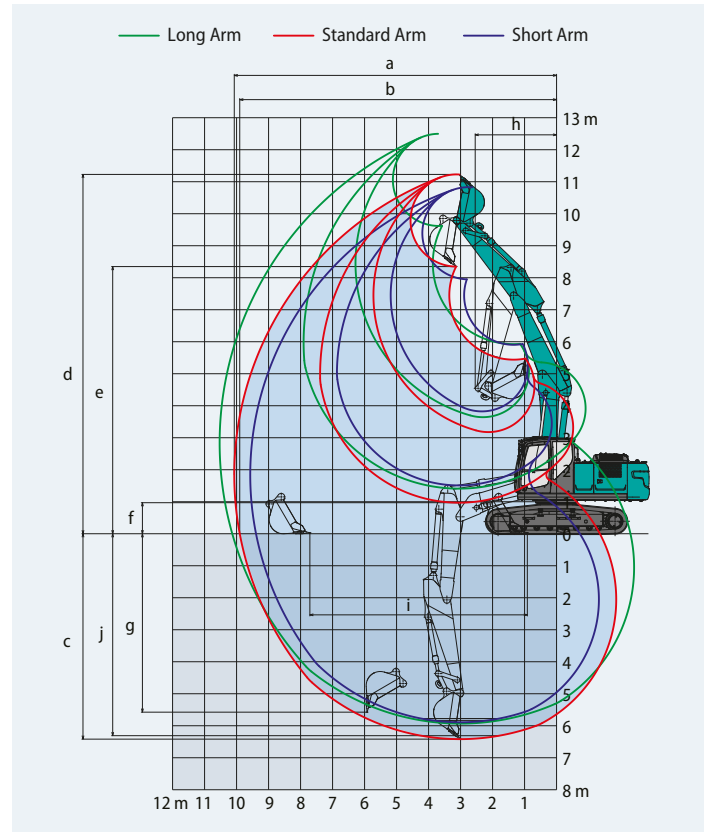

### Digging Force (ISO 6015)

Unit: kN

Arm length	Short 2.40 m	Standard 2.94 m	Long 3.50 m
Bucket digging force	143 157*	143 157*	143 157*
Arm crowding force	121 133*	102 112*	91.8 101*

\*Power Boost engaged.

### Dimensions (SK210LC/SK210NLC)

Unit: mm

Arm length		Short 2.40 m	Standard 2.94 m	Long 3.50 m
A	Overall length	9,760	9,740	9,730
B	Overall height (to top of boom)	3,030	2,970	3,280
C	Overall width of crawler	SK210LC	2,990	
		SK210NLC	2,800	
D	Overall height (to top of cab)	3,060		
E	Ground clearance of rear end*	1,060		
F	Ground clearance*	425		
G	Tail swing radius	2,910		
G'	Distance from centre of swing to rear end	2,900		
H	Tumbler distance	3,660		
I	Overall length of crawler	4,450		
J	Track gauge	SK210LC	2,390	
		SK210NLC	2,200	
K	Shoe width	600		
L	Overall width of upperstructure	2,710		


\*Without including height of shoe

### Dimensions (SK210SNLC)

Unit: mm

Arm length		Short 2.40 m	Standard 2.94 m
A	Overall length	9,660	9,640
B	Overall height (to top of boom)	3,030	2,970
C	Overall width of crawler	2,540	
D	Overall height (to top of cab)	3,060	
E	Ground clearance of rear end*	1,050	
F	Ground clearance*	425	
G	Tail swing radius	2,800	
G'	Distance from centre of swing to rear end	2,800	
H	Tumbler distance	3,660	
I	Overall length of crawler	4,450	
J	Track gauge	2,040	
K	Shoe width	500	
L	Overall width of upperstructure	2,540	

\*Without including height of shoe

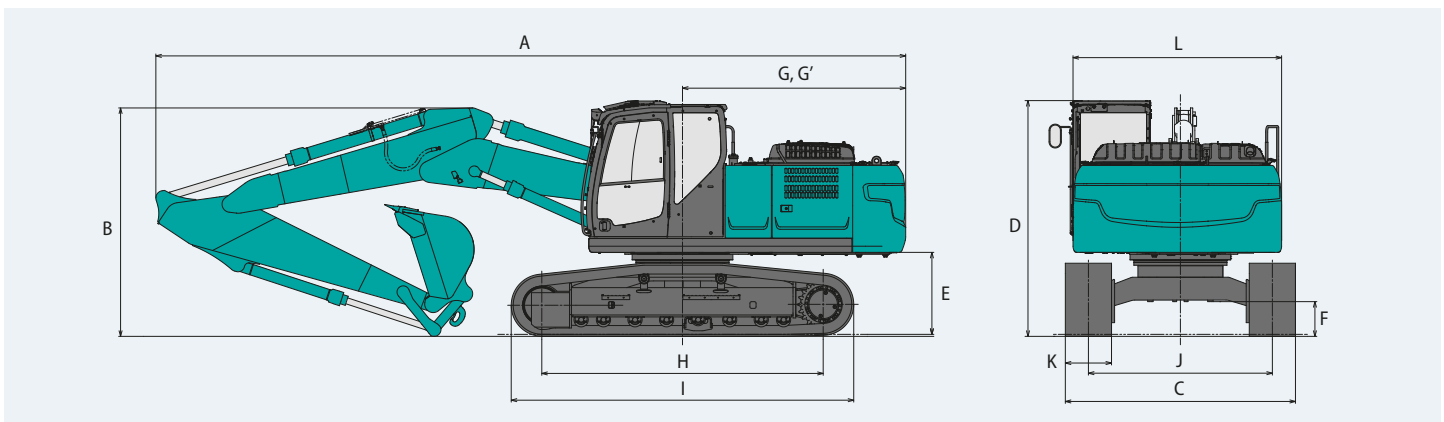

## Operating weight & ground pressure




In standard trim, with 2 Piece Boom, 2.94 m arm, and 0.8 m<sup>3</sup> ISO heaped bucket.

Shaped			Triple grouser shoes (even height)				
Shoe width		mm	500	600	700	790	900
Overall width of crawler	SK210LC	mm	—	2,990	3,090	3,180	3,290
	SK210NLC	mm	—	2,800	2,900	2,990	—
	SK210SNLC	mm	2,540	2,640	—	—	—
Ground pressure	SK210LC	kPa	—	48	42	37	33
	SK210NLC	kPa	—	47	41	37	—
	SK210SNLC	kPa	58	49	—	—	—
Operating weight	SK210LC	kg	—	22,900	23,400	23,600	23,900
	SK210NLC	kg	—	22,800	23,300	23,500	—
	SK210SNLC	kg	23,300	23,600	—	—	—

In standard trim, with 2 Piece Boom, 2.94 m arm, and 0.8 m<sup>3</sup> ISO heaped bucket (optional counterweight 4,900 kg).

Shaped			Triple grouser shoes (even height)			
Shoe width		mm	600	700	790	900
Overall width of crawler	SK210LC	mm	2,990	3,090	3,180	3,290
	SK210NLC	mm	2,800	2,900	2,990	—
Ground pressure	SK210LC	kPa	48	42	37	33
	SK210NLC	kPa	47	42	37	—
Operating weight	SK210LC	kg	23,500	24,000	24,200	24,500
	SK210NLC	kg	23,400	23,900	24,100	—













## Lift capacities



























A - Reach from swing centerline to arm top  
 B - Arm top height above/below ground  
 C - Lift point  
 Relief valve setting: 37.8 MPa (385 kgf/cm<sup>2</sup>)













SK210LC		2 Piece Boom		Arm: 2.94 m		Bucket: without		Counterweight: 4,300 kg		Shoe: 600 mm (Heavy Lift)				
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		
		Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Radius
9.0 m	kg					*5,880	*5,880					*4,930	*4,930	4.74 m
7.5 m	kg					*6,770	*6,770	*5,680	5,440			*4,040	*4,040	6.49 m
6.0 m	kg					*6,870	*6,870	*4,620	*4,620	*4,100	3,600	*3,700	3,550	7.55 m
4.5 m	kg			*10,460	*10,460	*9,180	8,220	*7,630	5,170	*4,820	3,560	*3,580	3,000	8.21 m
3.0 m	kg	*31,510	*31,510	*16,370	14,230	*10,810	7,440	7,780	4,830	*4,780	3,410	*3,610	2,720	8.55 m
1.5 m	kg			*17,860	12,690	*11,550	6,750	7,410	4,500	*5,140	3,250	*3,770	2,620	8.62 m
G.L.	kg	*19,950	*19,950	*14,860	12,300	*11,200	6,410	7,160	4,280	5,140	3,140	*4,100	2,670	8.42 m
-1.5 m	kg			*10,000	*10,000	*9,830	6,330	7,070	4,200	5,120	3,110	*4,690	2,910	7.93 m
-3.0 m	kg			*8,590	*8,590	*7,430	6,450	*5,640	4,270			*3,780	3,460	7.10 m
-4.5 m	kg			*11,920	*11,920	*6,720	*6,720					*1,810	*1,810	5.76 m

SK210LC		2 Piece Boom		Arm: 3.50 m		Bucket: without		Counterweight: 4,300 kg		Shoe: 600 mm (Heavy Lift)						
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At max. reach		
		Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Radius
9.0 m	kg					*5,740	*5,740							*4,030	*4,030	5.53 m
7.5 m	kg							*4,890	*4,890					*3,460	*3,460	7.09 m
6.0 m	kg							*5,890	5,520	*4,460	3,700			*3,240	3,180	8.07 m
4.5 m	kg					*6,900	*6,900	*6,880	5,270	*4,150	3,600			*3,170	2,720	8.69 m
3.0 m	kg	*27,450	*27,450	*15,750	14,900	*10,210	7,660	*7,810	4,900	*4,070	3,420	*3,330	2,490	*3,230	2,480	9.01 m
1.5 m	kg	*18,250	*18,250	*17,840	13,000	*11,280	6,880	7,450	4,530	*4,400	3,240	*3,890	2,410	*3,390	2,380	9.08 m
G.L.	kg	*19,130	*19,130	*6,700	*6,700	*11,360	6,410	7,140	4,260	5,100	3,090			*3,710	2,400	8.89 m
-1.5 m	kg			*9,990	*9,990	*10,390	6,230	6,990	4,120	5,020	3,020			*4,220	2,580	8.43 m
-3.0 m	kg			*10,660	*10,660	*8,420	6,280	*6,380	4,130	*4,300	3,070			*4,000	3,000	7.65 m
-4.5 m	kg			*14,570	13,100	*5,130	*5,130	*4,490	4,340					*2,700	*2,700	6.43 m

SK210LC		2 Piece Boom		Arm: 2.40 m		Bucket: without		Counterweight: 4,300 kg		Shoe: 600 mm (Heavy Lift)		At max. reach		Radius	
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach			
															
9.0 m	kg												*7,980	*7,980	3.73 m
7.5 m	kg					*8,830	8,770						*6,060	5,550	5.80 m
6.0 m	kg					*9,000	8,570	*5,580	5,290				*5,130	4,010	6.97 m
4.5 m	kg			*14,150	*14,150	*10,110	7,990	*4,770	*4,770	*5,240	3,490		*4,720	3,330	7.68 m
3.0 m	kg			*15,800	14,260	*11,250	7,210	7,690	4,750	5,400	3,380		*4,580	3,000	8.05 m
1.5 m	kg			*17,890	12,860	*11,600	6,630	7,360	4,460	5,260	3,250		*4,650	2,890	8.12 m
G.L.	kg	*25,320	*25,320	*15,660	12,430	*10,800	6,400	7,160	4,290	5,180	3,170		4,810	2,960	7.91 m
-1.5 m	kg			*9,810	*9,810	*9,050	6,410	*7,020	4,260				*4,810	3,270	7.39 m
-3.0 m	kg					*6,250	*6,250	*4,580	4,400				*3,540	*3,540	6.48 m

SK210LC		2 Piece Boom		Arm: 2.94 m		Bucket: without		Counterweight: 4,900 kg		Shoe: 600 mm (Heavy Lift)		At max. reach		Radius	
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach			
															
9.0 m	kg					*5,880	*5,880						*4,930	*4,930	4.74 m
7.5 m	kg					*6,770	*6,770	*5,680	*5,680				*4,040	*4,040	6.49 m
6.0 m	kg					*6,870	*6,870	*4,620	*4,620	*4,100	3,880		*3,700	*3,700	7.55 m
4.5 m	kg			*10,460	*10,460	*9,180	8,750	*7,630	5,530	*4,820	3,830		*3,580	3,520	8.21 m
3.0 m	kg	*31,510	*31,510	*16,370	15,220	*10,810	7,960	*8,150	5,190	*4,780	3,680		*3,610	2,960	8.55 m
1.5 m	kg			*17,860	13,680	*11,550	7,280	7,880	4,860	*5,140	3,520		*3,770	2,850	8.62 m
G.L.	kg	*19,950	*19,950	*14,860	13,290	*11,200	6,940	7,630	4,640	5,490	3,410		*4,100	2,910	8.42 m
-1.5 m	kg			*10,000	*10,000	*9,830	6,860	*7,480	4,560	5,460	3,390		*4,690	3,160	7.93 m
-3.0 m	kg			*8,590	*8,590	*7,430	6,980	*5,640	4,630				*3,780	3,750	7.10 m
-4.5 m	kg			*11,920	*11,920	*6,720	*6,720						*1,810	*1,810	5.76 m

SK210LC		2 Piece Boom		Arm: 3.50 m		Bucket: without		Counterweight: 4,900 kg		Shoe: 600 mm (Heavy Lift)		At max. reach		Radius		
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m				
																
9.0 m	kg					*5,740	*5,740						*4,030	*4,030	5.53 m	
7.5 m	kg							*4,890	*4,890				*3,460	*3,460	7.09 m	
6.0 m	kg							*5,890	5,880	*4,460	3,970		*3,240	*3,240	8.07 m	
4.5 m	kg					*6,900	*6,900	*6,880	5,630	*4,150	3,870		*3,170	2,950	8.69 m	
3.0 m	kg	*27,450	*27,450	*15,750	*15,750	*10,210	8,190	*7,810	5,260	*4,070	3,700	*3,330	2,710	*3,230	2,700	9.01 m
1.5 m	kg	*18,250	*18,250	*17,840	13,990	*11,280	7,410	7,920	4,890	*4,400	3,510	*3,890	2,630	*3,390	2,600	9.08 m
G.L.	kg	*19,130	*19,130	*6,700	*6,700	*11,360	6,930	7,610	4,620	*5,180	3,360		*3,710	2,630	8.89 m	
-1.5 m	kg			*9,990	*9,990	*10,390	6,760	7,460	4,480	5,370	3,290		*4,220	2,820	8.43 m	
-3.0 m	kg			*10,660	*10,660	*8,420	6,810	*6,380	4,490	*4,300	3,350		*4,000	3,270	7.65 m	
-4.5 m	kg			*14,570	14,090	*5,130	*5,130	*4,490	*4,490				*2,700	*2,700	6.43 m	

SK210LC		2 Piece Boom		Arm: 2.40 m		Bucket: without		Counterweight: 4,900 kg		Shoe: 600 mm (Heavy Lift)		At max. reach		Radius	
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach			
															
9.0 m	kg												*7,980	*7,980	3.73 m
7.5 m	kg					*8,830	*8,830						*6,060	5,920	5.80 m
6.0 m	kg					*9,000	*9,000	*5,580	*5,580				*5,130	4,310	6.97 m
4.5 m	kg			*14,150	*14,150	*10,110	8,520	*4,770	*4,770	*5,240	3,760		*4,720	3,600	7.68 m
3.0 m	kg			*15,800	15,250	*11,250	7,740	8,150	5,110	*5,500	3,650		*4,580	3,250	8.05 m
1.5 m	kg			*17,890	13,850	*11,600	7,160	7,830	4,820	5,610	3,520		*4,650	3,140	8.12 m
G.L.	kg	*25,320	*25,320	*15,660	13,420	*10,800	6,930	7,630	4,650	5,520	3,450		*4,930	3,220	7.91 m
-1.5 m	kg			*9,810	*9,810	*9,050	6,940	*7,020	4,620				*4,810	3,550	7.39 m
-3.0 m	kg					*6,250	*6,250	*4,580	*4,580				*3,540	*3,540	6.48 m



# SK210<sup>LC</sup>

SK210LC-11

# SK210<sup>NLC</sup>

SK210NLC-11

# SK210<sup>SNLC</sup>

SK210SNLC-11

SK210NLC		2 Piece Boom		Arm: 2.94 m		Bucket: without		Counterweight: 4,300 kg		Shoe: 600 mm (Heavy Lift)				
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius
9.0 m	kg					*5,880	*5,880					*4,930	*4,930	4.74 m
7.5 m	kg					*6,770	*6,770	*5,680	5,000			*4,040	*4,040	6.49 m
6.0 m	kg					*6,870	*6,870	*4,620	*4,620	*4,100	3,290	*3,700	3,240	7.55 m
4.5 m	kg			*10,460	*10,460	*9,180	7,500	*7,630	4,730	*4,820	3,250	*3,580	2,730	8.21 m
3.0 m	kg	*31,510	*31,510	*16,370	12,600	*10,810	6,730	7,760	4,400	*4,780	3,100	*3,610	2,470	8.55 m
1.5 m	kg			*17,860	11,140	*11,550	6,070	7,390	4,070	*5,140	2,940	*3,770	2,370	8.62 m
G.L.	kg	*19,950	*19,950	*14,860	10,760	*11,200	5,730	7,140	3,860	5,130	2,830	*4,100	2,410	8.42 m
-1.5 m	kg			*10,000	*10,000	*9,830	5,660	7,050	3,780	5,100	2,810	*4,690	2,630	7.93 m
-3.0 m	kg			*8,590	*8,590	*7,430	5,770	*5,640	3,850			*3,780	3,130	7.10 m
-4.5 m	kg			*11,920	11,800	*6,720	6,140					*1,810	*1,810	5.76 m

SK210NLC		2 Piece Boom		Arm: 3.50 m		Bucket: without		Counterweight: 4,300 kg		Shoe: 600 mm (Heavy Lift)						
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At max. reach		
															Radius	
9.0 m	kg					*5,740	*5,740							*4,030	*4,030	5.53 m
7.5 m	kg							*4,890	*4,890					*3,460	*3,460	7.09 m
6.0 m	kg							*5,890	5,070	*4,460	3,390			*3,240	2,900	8.07 m
4.5 m	kg					*6,900	*6,900	*6,880	4,820	*4,150	3,290			*3,170	2,470	8.69 m
3.0 m	kg	*27,450	*27,450	*15,750	13,230	*10,210	6,950	*7,810	4,460	*4,070	3,120	*3,330	2,250	*3,230	2,240	9.01 m
1.5 m	kg	*18,250	*18,250	*17,840	11,430	*11,280	6,190	7,440	4,100	*4,400	2,930	*3,890	2,180	*3,390	2,140	9.08 m
G.L.	kg	*19,130	*19,130	*6,700	*6,700	11,330	5,730	7,130	3,830	5,090	2,780			*3,710	2,160	8.89 m
-1.5 m	kg			*9,990	*9,990	*10,390	5,560	6,970	3,700	5,010	2,720			*4,220	2,330	8.43 m
-3.0 m	kg			*10,660	*10,660	*8,420	5,610	*6,380	3,710	*4,300	2,770			*4,000	2,710	7.65 m
-4.5 m	kg			*14,570	11,520	*5,130	*5,130	*4,490	3,910					*2,700	*2,700	6.43 m

SK210NLC		2 Piece Boom		Arm: 2.40 m		Bucket: without		Counterweight: 4,300 kg		Shoe: 600 mm (Heavy Lift)						
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius		
9.0 m	kg													*7,980	*7,980	3.73 m
7.5 m	kg					*8,830	8,040							*6,060	5,080	5.80 m
6.0 m	kg					*9,000	7,840	*5,580	4,850					*5,130	3,670	6.97 m
4.5 m	kg			*14,150	*14,150	*10,110	7,270	*4,770	4,630	*5,240	3,180	*4,720	3,030	*4,720	3,030	7.68 m
3.0 m	kg			*15,800	12,620	*11,250	6,520	7,670	4,320	5,390	3,070	*4,580	2,730	*4,580	2,730	8.05 m
1.5 m	kg			*17,890	11,300	11,580	5,950	7,340	4,040	5,250	2,940	*4,650	2,620	*4,650	2,620	8.12 m
G.L.	kg	*25,320	*25,320	*15,660	10,890	*10,800	5,730	7,150	3,870	5,170	2,870	4,800	2,680	4,800	2,680	7.91 m
-1.5 m	kg			*9,810	*9,810	*9,050	5,740	*7,020	3,840					*4,810	2,960	7.39 m
-3.0 m	kg					*6,250	5,920	*4,580	3,980					*3,540	*3,540	6.48 m















SK210NLC		2 Piece Boom		Arm: 2.94 m		Bucket: without		Counterweight: 4,900 kg		Shoe: 600 mm (Heavy Lift)						
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach		Radius		
9.0 m	kg					*5,880	*5,880							*4,930	*4,930	4.74 m
7.5 m	kg					*6,770	*6,770	*5,680	5,340					*4,040	*4,040	6.49 m
6.0 m	kg					*6,870	*6,870	*4,620	*4,620	*4,100	3,560			*3,700	3,500	7.55 m
4.5 m	kg			*10,460	*10,460	*9,180	8,000	*7,630	5,080	*4,820	3,510	*3,580	2,970	*3,580	2,970	8.21 m
3.0 m	kg	*31,510	*31,510	*16,370	13,510	*10,810	7,230	*8,150	4,740	*4,780	3,360	*3,610	2,690	*3,610	2,690	8.55 m
1.5 m	kg			*17,860	12,050	*11,550	6,570	7,860	4,420	*5,140	3,210	*3,770	2,590	*3,770	2,590	8.62 m
G.L.	kg	*19,950	*19,950	*14,860	11,680	*11,200	6,230	7,610	4,200	5,470	3,090	*4,100	2,640	*4,100	2,640	8.42 m
-1.5 m	kg			*10,000	*10,000	*9,830	6,160	*7,480	4,120	5,450	3,070	*4,690	2,870	*4,690	2,870	7.93 m
-3.0 m	kg			*8,590	*8,590	*7,430	6,270	*5,640	4,190					*3,780	3,410	7.10 m
-4.5 m	kg			*11,920	*11,920	*6,720	6,640							*1,810	*1,810	5.76 m















**Notes:**















- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
- Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
- Arm top defined as lift point.
- The above lift capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lift















capacity or 75% of tipping load. Lift capacities marked with an asterisk (\*) are limited by hydraulic capacity rather than tipping load.

- Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
- Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

SK210NLC		2 Piece Boom		Arm: 3.50 m		Bucket: without		Counterweight: 4,900 kg		Shoe: 600 mm (Heavy Lift)						
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		At max. reach		
																Radius
9.0 m	kg					*5,740	*5,740							*4,030	*4,030	5.53 m
7.5 m	kg							*4,890	*4,890					*3,460	*3,460	7.09 m
6.0 m	kg							*5,890	5,420	*4,460	3,650			*3,240	3,140	8.07 m
4.5 m	kg					*6,900	*6,900	*6,880	5,170	*4,150	3,550			*3,170	2,690	8.69 m
3.0 m	kg	*27,450	*27,450	*15,750	14,140	*10,210	7,450	*7,810	4,810	*4,070	3,380	*3,330	2,460	*3,230	2,450	9.01 m
1.5 m	kg	*18,250	*18,250	*17,840	12,340	*11,280	6,690	7,910	4,450	*4,400	3,190	*3,890	2,390	*3,390	2,350	9.08 m
G.L.	kg	*19,130	*19,130	*6,700	*6,700	*11,360	6,230	7,590	4,180	*5,180	3,050			*3,710	2,380	8.89 m
-1.5 m	kg			*9,990	*9,990	*10,390	6,070	7,440	4,050	5,350	2,980			*4,220	2,550	8.43 m
-3.0 m	kg			*10,660	*10,660	*8,420	6,110	*6,380	4,060	*4,300	3,030			*4,000	2,970	7.65 m
-4.5 m	kg			*14,570	12,430	*5,130	*5,130	*4,490	4,260					*2,700	*2,700	6.43 m

SK210NLC		2 Piece Boom		Arm: 2.40 m		Bucket: without		Counterweight: 4,900 kg		Shoe: 600 mm (Heavy Lift)						
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach				
																Radius
9.0 m	kg													*7,980	*7,980	3.73 m
7.5 m	kg					*8,830	8,540							*6,060	5,440	5.80 m
6.0 m	kg					*9,000	8,340	*5,580	5,190					*5,130	3,950	6.97 m
4.5 m	kg			*14,150	*14,150	*10,110	7,770	*4,770	*4,770	*5,240	3,440			*4,720	3,290	7.68 m
3.0 m	kg			*15,800	13,530	*11,250	7,020	8,140	4,670	*5,500	3,330			*4,580	2,970	8.05 m
1.5 m	kg			*17,890	12,210	*11,600	6,450	7,810	4,380	5,590	3,210			*4,650	2,860	8.12 m
G.L.	kg	*25,320	*25,320	*15,660	11,800	*10,800	6,230	7,610	4,210	5,510	3,130			*4,930	2,930	7.91 m
-1.5 m	kg			*9,810	*9,810	*9,050	6,240	*7,020	4,190					*4,810	3,230	7.39 m
-3.0 m	kg					*6,250	*6,250	*4,580	4,330					*3,540	*3,540	6.48 m

SK210SNLC		2 Piece Boom		Arm: 2.94 m		Bucket: without		Counterweight: 4,900 kg		Shoe: 500 mm (Heavy Lift)						
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach				
																Radius
9.0 m	kg					*5,330	*5,330							*4,460	*4,460	4.74 m
7.5 m	kg					*6,130	*6,130	*5,100	4,980					*3,650	*3,650	6.49 m
6.0 m	kg					*6,210	*6,210	*4,130	*4,130	*3,700	3,300			*3,340	3,250	7.55 m
4.5 m	kg			*9,450	*9,450	*8,300	7,420	*6,810	4,720	*4,310	3,260			*3,230	2,750	8.21 m
3.0 m	kg	*28,190	*28,190	*14,620	12,230	*9,640	6,670	*7,250	4,390	*4,270	3,120			*3,250	2,490	8.55 m
1.5 m	kg			*15,880	10,830	*10,260	6,020	*7,530	4,080	*4,590	2,960			*3,400	2,390	8.62 m
G.L.	kg	*18,160	*18,160	*13,120	10,470	*9,920	5,690	*7,370	3,860	*5,260	2,850			*3,700	2,430	8.42 m
-1.5 m	kg			*9,060	*9,060	*8,660	5,620	*6,600	3,790	*4,800	2,830			*4,100	2,650	7.93 m
-3.0 m	kg			*7,450	*7,450	*6,500	5,730	*4,930	3,850					*3,270	3,150	7.10 m
-4.5 m	kg			*10,510	*10,510	*5,880	*5,880							*1,470	*1,470	5.76 m

SK210SNLC		2 Piece Boom		Arm: 2.40 m		Bucket: without		Counterweight: 4,900 kg		Shoe: 500 mm (Heavy Lift)						
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		At max. reach				
																Radius
9.0 m	kg													*7,240	*7,240	3.73 m
7.5 m	kg					*7,980	7,940							*5,450	5,060	5.80 m
6.0 m	kg					*8,150	7,750	*5,010	4,840					*4,600	3,680	6.97 m
4.5 m	kg			*12,700	*12,700	*9,050	7,190	*4,260	*4,260	*4,690	3,200			*4,220	3,050	7.68 m
3.0 m	kg			*14,110	12,250	*10,030	6,460	*7,470	4,320	*4,920	3,090			*4,090	2,750	8.05 m
1.5 m	kg			*15,910	10,990	*10,310	5,910	*7,600	4,040	*5,250	2,960			*4,150	2,640	8.12 m
G.L.	kg	*22,430	*22,430	*13,860	10,590	*9,550	5,690	*7,240	3,880	*5,430	2,890			*4,400	2,700	7.91 m
-1.5 m	kg			*8,560	*8,560	*7,970	5,700	*6,190	3,850					*4,210	2,980	7.39 m
-3.0 m	kg					*5,430	*5,430	*3,980	*3,980					*3,050	*3,050	6.48 m


**Notes:**

- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
- Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
- Arm top defined as lift point.
- The above lift capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Lift capacities marked with an asterisk (\*) are limited by hydraulic capacity rather than tipping load.
- Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
- Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.

## Long Reach Attachment Specifications

### Working ranges

		Unit: m
Boom		8.75 m
Range	Arm	6.35 m
a- Max. digging reach		15.82
b- Max. digging reach at ground level		15.71
c- Max. digging depth		12.01
d- Max. digging height		13.90
e- Max. dumping clearance		11.53
f- Min. dumping clearance		2.08
g- Max. vertical wall digging depth		11.19
h- Min. swing radius		4.73
i- Horizontal digging stroke at ground level		11.61
j- Digging depth for 2.4 m (8') flat bottom		11.91
Bucket capacity ISO heaped m <sup>3</sup>		0.45

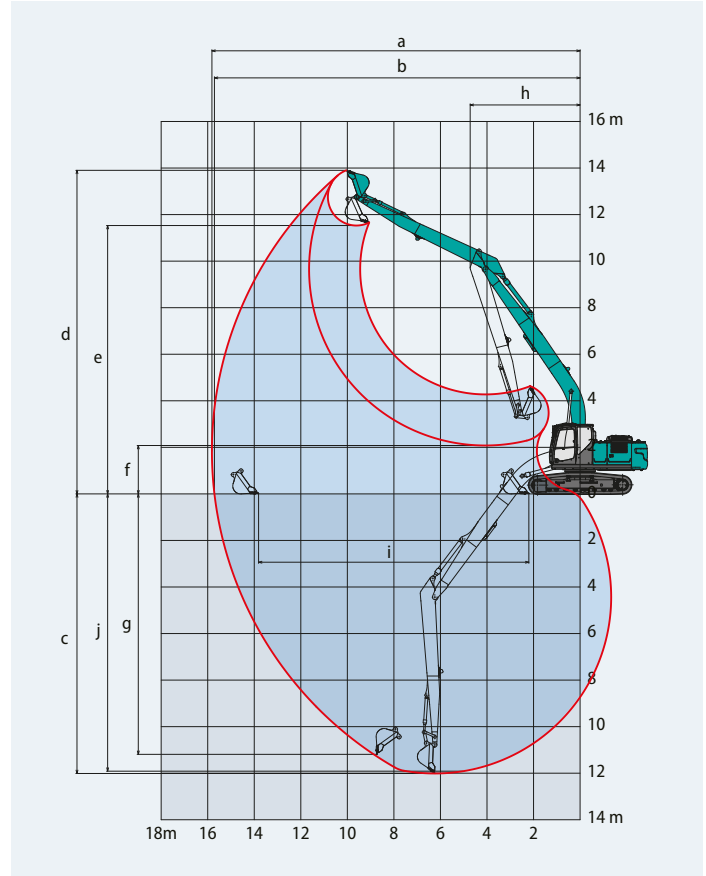

### Digging Force (ISO 6015)


		Unit: kN
Arm length	Standard	6.35 m
Bucket digging force		88
Arm crowding force		54

### Dimensions (SK210LC)

		Standard
Arm length		6.35 m
A Overall length		12,690
B Overall height (to top of boom)		3,160
C Overall width of crawler		2,990
D Overall height (to top of cab)		3,060
E Ground clearance of rear end*		1,060
F Ground clearance*		425

		Unit: mm
G Tail swing radius		2,910
G' Distance from centre of swing to rear end		2,900
H Tumbler distance		3,660
I Overall length of crawler		4,450
J Track gauge		2,390
K Shoe width		600
L Overall width of upperstructure		2,710

\*Without including height of shoe

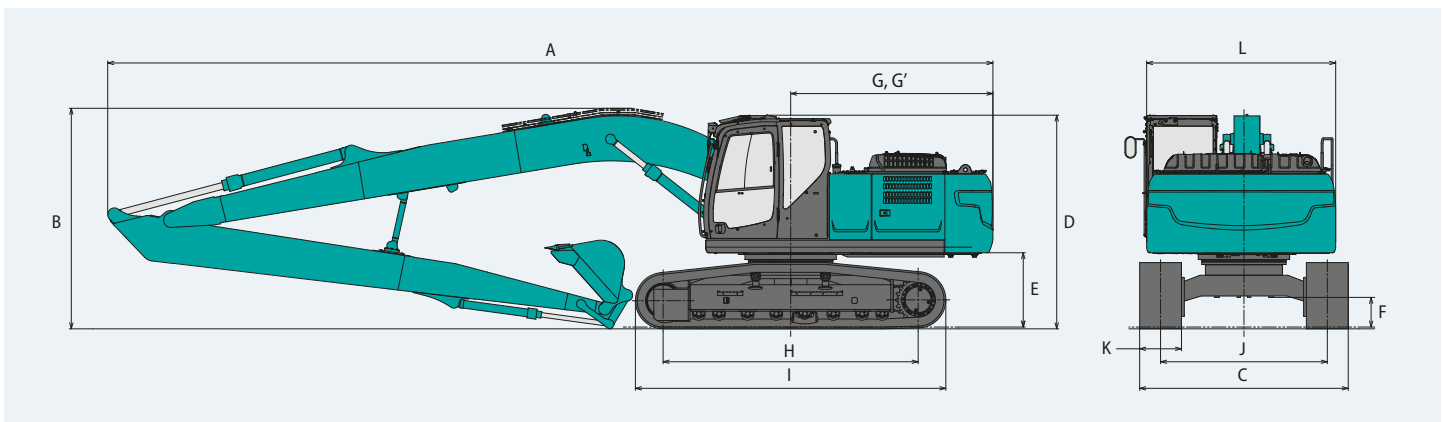





# Operating weight & ground pressure

In standard trim, with 8.75 m boom, 6.35 m arm, and 0.45 m<sup>3</sup> ISO heaped bucket.

Shaped		Triple grouser shoes (even height)			
Shoe width	mm	600	700	790	900
Overall width of crawler	mm	2,990	3,090	3,180	3,290
Ground pressure	kPa	49	43	38	34
Operating weight	kg	23,400	23,900	24,100	24,400

## Lift capacities

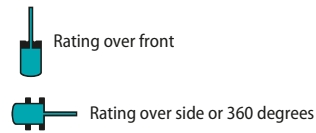

A - Reach from swing centerline to arm top  
 B - Arm top height above/below ground  
 C - Lift point  
 Relief valve setting: 34.3 MPa (350 kgf/cm<sup>2</sup>)

SK210LC		Boom: 8.75 m Arm: 6.35 m Bucket: without Counterweight: 5,490 kg Shoe: 600mm																							
B	A	1.5 m		3.0 m		4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		12.0 m		13.5 m		At max. reach		Radius			
		Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees	Rating over front	Rating over side or 360 degrees				
12.0 m	kg																				*1,080	*1,080	10.44 m		
10.5 m	kg													*1,880	*1,880							*1,000	*1,000	11.72 m	
9.0 m	kg													*2,220	*2,220	*1,620	*1,620					*950	*950	12.70 m	
7.5 m	kg													*2,430	*2,430	*2,070	*2,070					*930	*930	13.44 m	
6.0 m	kg													*2,560	*2,560	*2,400	2,060	*1,510	*1,510			*930	*930	13.98 m	
4.5 m	kg													*3,020	*3,020	*2,740	2,520	*2,550	1,980	*1,900	1,560	*940	*940	14.35 m	
3.0 m	kg			*5,190	*5,190	*6,520	*6,520	*4,810	*4,810	*3,890	*3,890	*3,330	3,050	*2,950	2,380	*2,680	1,880	*2,190	1,500	*970	*970			14.54 m	
1.5 m	kg					*7,340	7,280	*5,600	4,990	*4,380	3,680	*3,640	2,830	*3,160	2,230	*2,810	1,780	2,350	1,440	*1,020	*1,020			14.58 m	
G.L.	kg			*2,060	*2,060	*4,980	*4,980	*6,190	4,520	*4,780	3,380	*3,910	2,630	*3,340	2,090	2,760	1,690	2,300	1,380	*1,090	*1,090			14.47 m	
-1.5 m	kg	*2,040	*2,040	*2,810	*2,810	*4,960	*4,960	*6,520	4,230	*5,050	3,160	4,040	2,470	3,250	1,990	2,680	1,620	2,250	1,340	*1,180	*1,180			14.19 m	
-3.0 m	kg	*2,940	*2,940	*3,720	*3,720	*5,610	*5,610	*6,610	4,090	5,070	3,030	3,930	2,370	3,170	1,910	2,630	1,570	*1,860	1,320	*1,320	1,290			13.75 m	
-4.5 m	kg	*3,880	*3,880	*4,740	*4,740	*6,630	6,140	*6,480	4,040	5,010	2,970	3,880	2,320	3,140	1,880	2,620	1,560				*1,510	1,380		13.11 m	
-6.0 m	kg	*4,890	*4,890	*5,910	*5,910	*7,960	6,250	*6,120	4,080	*4,890	2,980	3,880	2,320	3,150	1,890	*2,580	1,590				*1,800	1,550		12.26 m	
-7.5 m	kg	*6,030	*6,030	*7,300	*7,300	*7,040	6,440	*5,510	4,190	*4,440	3,050	*3,620	2,380	*2,900	1,950							*2,290	1,820		11.15 m
-9.0 m	kg			*7,450	*7,450	*5,700	*5,700	*4,550	4,380	*3,660	3,200	*2,860	2,520									*2,470	2,310		9.67 m
-10.5 m	kg					*3,700	*3,700	*2,980	*2,980	*2,190	*2,190											*2,110	*2,110		7.62 m

### Notes:

- Do not attempt to lift or hold any load that is greater than these lift capacities at their specified lift point radius and heights. Weight of all accessories must be deducted from the above lift capacities.
- Lift capacities are based on machine standing on level, firm, and uniform ground. User must make allowance for job conditions such as soft or uneven ground, out of level conditions, side loads, sudden stopping of loads, hazardous conditions, experience of personnel, etc.
- Arm top defined as lift point.
- The above lift capacities are in compliance with ISO 10567. They do not exceed 87% of hydraulic lift capacity or 75% of tipping load. Lift capacities marked with an asterisk (\*) are limited by hydraulic capacity rather than tipping load.
- Operator should be fully acquainted with the Operator's and Maintenance Instructions before operating this machine. Rules for safe operation of equipment should be adhered to at all times.
- Lift capacities apply to only machine as originally manufactured and normally equipped by KOBELCO CONSTRUCTION MACHINERY CO., LTD.



# Standard and Optional Equipment

● = Std ○ = Opt — = N/A

Category	Description	SK210(N)LC-11			
		Mono Boom / 2 Piece Boom			Long Reach
		LC	NLC	SNLC	LC
ENGINE	Hino J05EVA-KSSA	-		●	●
	Hino J05EVA-KSSN			-	-
	Exhaust DOC DPF SCR system			●	
	Alternator 24 V/60 A			●	
	Starter motor 24 V/5 kW			●	
	Batteries 2 x 12 V (112 Ah)			●	
	Fan suction type cooling system			●	
	Auto deceleration function			●	
	Auto idle stop			●	
HYDRAULIC SYSTEM	3 work modes H, S, Eco			●	
	Power boost (37.8 MPa (385 kgf/cm <sup>2</sup> ))		●		-
	Heavy lift mode		●		-
	Pressure release function			●	
	Independent travel function			●	
	Auto warm up system			●	
	Proportional Hand Control (for E&N&B piping)		●		-
	Proportional Hand Control (for Extra piping)		-		●
	Hydraulic oil VG32			○	
	Hydraulic oil VG46			○	
PIPING	Hydraulic oil VG68			○	
	E & N&B piping		●		-
	E & N&B piping + Bigger capacity P4 pump (89.4 L/min)	○	○		-
	Standard piping (only mono Boom spec)			-	
	Extra piping		-		●
CABIN	QH piping			●	
	Air suspension seat with heating			●	
	10 inch colour monitor			●	
	LED door light			●	
	Air-conditioner			●	
	DAB+ radio (FM/AM & AUX & USB & Bluetooth* & hands free telephone)			●	
	Harness for CAB four lights and CAB yellow flasher			●	
	Parallel wiper			●	
	12 V power supply			●	
	Rain visor			○	
	Sun screen			○	
LIGHTS	LED work lights ; 2 on Boom & 1 on upper frame			●	
	LED work lights ; 2 on CAB top front			○	
WORKING EQUIPMENT	Standard Boom (5.65 m)		●		-
	2 Piece Boom		○		-
	Long Reach (50 ft)		-		●
	Standard HD arm (2.94 m) with rock guard	●		○	-
	Short HD arm (2.40 m) with rock guard	○		●	-
	Long HD arm (3.50 m) with rock guard	○		-	-
	Long Reach arm (6.35 m)		-		●
COUNTERWEIGHT	OHK hook		●		-
	Standard C/W (TTL 4,300 kg)	●			-
	Standard C/W (TTL 4,900 kg)	-		●	-
	Semi heavier C/W (TTL 4,900 kg)	○		-	-
UNDERCARRIAGE	Heavier C/W (TTL 5,490 kg)		-		●
	500 mm steel shoe			●	-
	600 mm steel shoe	●		○	●
	700 mm steel shoe	○		-	○
	790 mm steel shoe	○		-	○
	900 mm steel shoe	○		-	○
	Track guide (one per side)	○		-	○
	Additional track guides (two additional per side)			○	
SAFETY	Lower frame guard			●	
	Engine emergency stop switch			●	
	Pump emergency mode (KPSS release switch)			●	
	Emergency accel dial			●	
	Emergency manual valve for lowering attachment			●	
	Overload alarm			●	
	Safety valve for Boom & arm cylinder			●	
	ROPS compliant cab (ISO 12117-2:2008)			●	
	OPG Level II top guard (ISO 10262:1998)			●	
	OPG Level II front guard (ISO 10262:1998)			○	
	Eagle-eye view camera (Rear, Right, Left)			●	
	Seatbelt indicator on display			●	
	Travel alarm			●	
	Extended guard rail	○		-	○
	OTHERS	Refueling pump			●
Harness for engine room light				●	
Ral color				○	
KOMEXS				●	

\*The air conditioning system on this machine contains fluorinated greenhouse gas HFC-134a (GWP 1430). Quantity of gas 0.9 kg (CO<sub>2</sub> equivalent 1.3 t).  
Note: Bluetooth\* is a registered trademark of the Bluetooth SIG Inc.

Note: This catalogue may contain attachments and optional equipment that are not available in your area. And it may contain photographs of machines with specifications that differ from those of machines sold in your areas. Please consult your nearest KOBELCO distributor for those items you require.  
Specialist equipment is needed to use this machine in demolition work. Before using it please contact your KOBELCO dealer.  
Due to our policy of continuous product improvements all designs and specifications are subject to change without advance notice.  
Copyright by **KOBELCO CONSTRUCTION MACHINERY CO., LTD.** catalogue may be reproduced in any manner without notice.

## KOBELCO CONSTRUCTION MACHINERY EUROPE B.V.

Veluwezoom 15  
1327 AE Almere  
The Netherlands  
www.kobelco-europe.com

Enquiries To: